

Unfluxed Desoldering Braid Product# 1830-1833

Product Description

For customers who use water-soluble flux, or their own flux for aqueous processes. *Specifications: Meets or Exceeds MIL-F-14256; NASA NHB 5300, 4 (34-1); NASA NPC 200-4; NASA SP5002; 1821:HP 8690-0588; 1823: HP 8690-0577; IPC Standard-J-STD-004*

Size chart:

Braid #	Color Code	Width (in)	Width (mm)
#1	White	0.035	0.9
#2	Yellow	0.055	1.4
#3	Green	0.075	1.9
#4	Blue	0.098	2.5

Features / Benefits

- Apply your own flux
- Ideal for aqueous fluxes
- Allows flux matching in process
- Exceeds MIL-F-14256
- Anti-static spools

Environmental Policy


Techspray® is committed to developing products to ensure a safer and cleaner environment. We will continue to meet and sustain the regulations of all federal, state and local government agencies.

Resources

Techspray® products are supported by global sales, technical and customer services resources.

For additional technical information on this product or other Techspray® products in the United States, call the technical sales department at 800-858-4043, email tsales@techspray.com or visit our web site at: www.techspray.com.

Important Notice to Purchaser/User: The information in this publication is based on tests that we believe are reliable. The results may vary due to differences in tests type and conditions. We recommend that each user evaluate the product to determine its suitability for the intended application. Conditions of use are outside our control and vary widely. Techspray's only obligation and your only solution is replacement of product that is shown to be defective when you receive it. In no case will Techspray® be liable for any special, incidental, or consequential damages based on breach of warranty, negligence or any other theory.

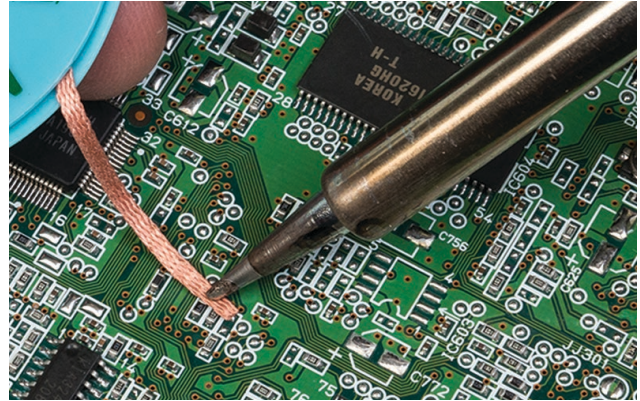

Packaging and Availability

Part#	Size#	Size Color	Length	ESD-safe Bobbin
1830-10F	#1	White	10ft (3M)	Yes
1831-10F	#2	Yellow	10ft (3M)	Yes
1832-5F	#3	Green	5ft (1.5M)	Yes
1833-10F	#4	Blue	10ft (3M)	Yes