


REV.	DATE	DESCRIPTION				
Q	05/01/04	REFÜRMAT DRAWING				



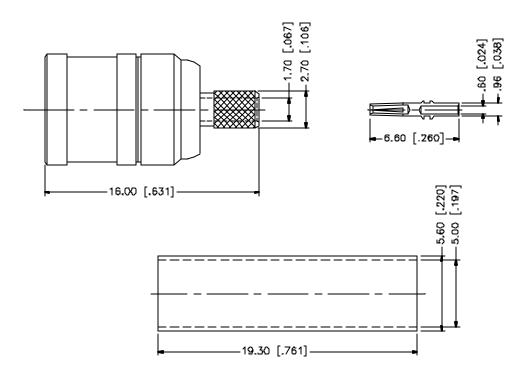



NOTE:

- 1. CRIMPED FERRULE HEX CRIMP SIZE .151"
- 2. CONTACT PIN TO SOLDER

В					unlebb ötherinde øpedired dimenbiong are in millimeterg. Dimenbiong in [] are in incheb and för cligitiner referance only.	APPROVALS		DATE	Amphanal Canney						
7					unless ötherveie specifies Täleranges för millmeteris arci	DRAWN	G.R.S.	05/01/04	4	Amphenol Connex PART DESIGNATION					
6					0.5 - 8mm ± 0.20mm 8 - 30mm ± 0.40mm	CHECKED			PART DESCR						
5		FERRULE BRASS NICKEL 1 30 - 120mm ± 0.50m						SMB CRIMP PLUG (FOR RG-316/U DOUBLE BRAID CABLE)							
4	FERRULE			1		ISBUED									
3	CONTACT PIN	PHOS. BRONZE	GOLD .	1	UNLESS OTHERWISE STEGFED TOLERANGES FOR INGRES ARE:	SHEET 1 OF 1				(LOK KG-219) O DOUBLE BRAID					
2	INSULATOR	TEFLÓN	Natural	1	.020315 = ± 0.007				PART NO.						
1	HOWSING/BODY	BRA55	NKCKEL	1	.315 - 1.180 = ± 0.015" 1.180 - 4.724 = ± 0.020"					142183					
	DESCRIPTION	MATERIAL	FINI5H	QTY	DO NOT SCALE DRAWING	C:/142/142183.DWG		2183.DWG	DWG. ND.	142183.DWG	REV. D	BIZE A	SCALE NA		

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

 $\frac{\text{Amphenol}}{\frac{142183}{}}$