


PROBE HEAD VARIANTS

 HARWIN PART NO. P25-1126	 HARWIN PART NO. P25-3226	 HARWIN PART NO. P25-4526	 HARWIN PART NO. P25-6526
 HARWIN PART NO. P25-0126	 HARWIN PART NO. P25-0626	 HARWIN PART NO. P25-4626	 HARWIN PART NO. P25-6226
 HARWIN PART NO. P25-0226	 HARWIN PART NO. P25-4026	 HARWIN PART NO. P25-5026	 HARWIN PART NO. P25-6326
 HARWIN PART NO. P25-2026	 HARWIN PART NO. P25-4126	 HARWIN PART NO. P25-5126	 HARWIN PART NO. P25-1826
 HARWIN PART NO. P25-2126	 HARWIN PART NO. P25-4226	 HARWIN PART NO. P25-7126	 HARWIN PART NO. P25-1626
 HARWIN PART NO. P25-3426	 HARWIN PART NO. P25-4326	 HARWIN PART NO. P25-7326	 HARWIN PART NO. P25-1726
 HARWIN PART NO. P25-3526	 HARWIN PART NO. P25-4426	 HARWIN PART NO. P25-6426	<b>OBSOLETE</b>

NOTES:  
 1. TO BE USED WITH SLEEVES S25-XX6.  
 2. MINIMUM CENTRES = 2.54mm.  
 3. MATERIALS AND FINISH:  
 PLUNGER = HEAT TREATED BERYLLIUM COPPER, RHODIUM PLATED OVER HARD NICKEL.  
 BARREL = PHOSPHOR BRONZE, GOLD PLATED  
 SPRING = MUSIC WIRE, GOLD PLATED  
 P25-7126/7326 TIPS = HIGH CARBON STEEL, NICKEL PLATED

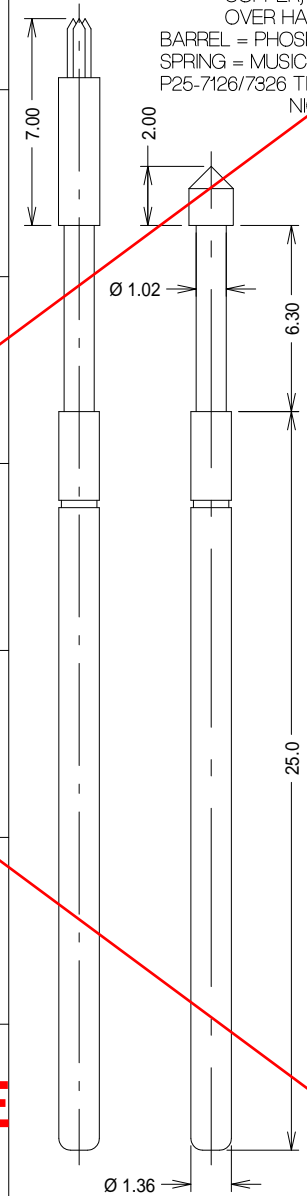

SPECIFICATIONS:  
 FULL TRAVEL = 6.30mm  
 SPRING FORCE = 1.47N (150g) @ 6.30mm  
 CURRENT RATING = 3 AMPS  
 CONTACT RESISTANCE = 50 MILLIOHMS

ORDER CODE:  
 P25-XX26  
 PROBE HEAD VARIANT (SEE TABLE)

CUSTOMER INFORMATION SHEET

1	14.01.97	----
ISS.	DATE	C/N
APPROVED:		
CHECKED:		
DRAWN: W. BOURNE		
CUSTOMER REF.		
ASSEMBLY DRG:		



HARWIN INC U.S.A. TEL: (812) 285 0055 FAX: (812) 285 0056	HARWIN PLC U.K. TEL: 01705 370451 FAX: 01705 314590	HARWIN PTE SINGAPORE TEL: 65 7794909 FAX: 65 7793868	HARWIN CONNECTORS KOREA TEL: 822 521 0747 FAX: 822 521 0749
--	--	---	--

TOLERANCES  
 X. = ±1mm  
 XX = ±0.25mm  
 XXX = ±0.10mm  
 XXXX = ±0.01mm  
 ANGLES = ±1°  
 UNLESS STATED

MATERIAL:  
 SEE NOTE 3  
 FINISH: SEE NOTE 3  
 S/AREA: mm

TITLE:  
 2.54mm MIN. CENTRE  
 TWO-PIECE SPRING PROBE  
 DRAWING NUMBER:  
 P25-XX26  
 SHT 2 OF 2