

# SMA Connectorized Power Splitter/Combiner

## ZX10Q-2-7-S+ ZX10Q-2-7-S

2 Way-90° 50Ω 425 to 675 MHz

### Maximum Ratings

Operating Temperature	-40°C to 85°C
Storage Temperature	-55°C to 100°C
Power Input (as a splitter)	20W* max.

\* Derate linearly to 7W at 100°C ambient.  
Permanent damage may occur if any of these limits are exceeded.


### Coaxial Connections

INPUT PORT	1
PORT 1 (+90°)	2
PORT 2 (0°)	3
50 OHM TERM EXTERNAL**	4



\*\* Recommended external termination  
Mini-Circuits Part. No. ANNE-50L

### Outline Drawing

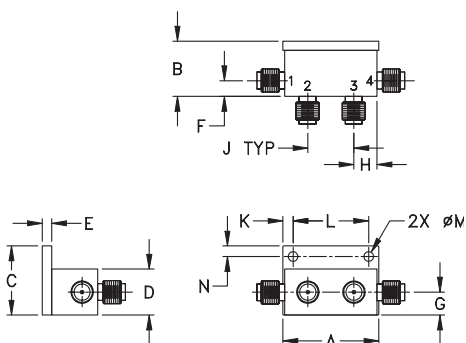

### Outline Dimensions (inch/mm)

A	B	C	D	E	F	G	
1.04	.60	.75	.50	.10	.17	.25	
26.42	15.24	19.05	12.70	2.54	4.32	6.35	
H	J	K	L	M	N	wt.	
.25	.50	.11	.820	.106	.12	grams	
6.35	12.70	2.79	20.83	2.69	3.05	21.0	

### Features

- low insertion loss, 0.4 dB typ.
- excellent amplitude unbalance
- very good phase unbalance
- small size
- low cost
- protected by U.S Patent 6,790,049

### Applications

- UHF
- balanced amplifiers
- modulators




### Electrical Specifications (T<sub>AMB</sub>=25°C)

FREQ. RANGE (MHz)	ISOLATION (dB)		INSERTION LOSS (dB) Avg. of Coupled Outputs ABOVE 3 dB		PHASE UNBALANCE (Degrees)		AMPLITUDE UNBALANCE (dB)	
	Typ.	Min.	Typ.	Max.	Typ.	Max.	Typ.	Max.
f <sub>L</sub> -f <sub>H</sub>								
425-675								
425-550	17	13	0.4	0.7	2	8	0.5	1.0
550-675	17	11	0.6	1.0	4	5	0.5	1.0


### Typical Performance Data

Frequency (MHz)	Total Loss <sup>1</sup> (dB)		Amplitude Unbalance (dB)	Isolation (dB)	Phase Unbalance (deg.)	VSWR <sub>S</sub>	VSWR <sub>1</sub>	VSWR <sub>2</sub>
	S-1	S-2						
425.00	3.08	3.77	0.69	16.15	85.67	1.32	1.30	1.26
435.00	3.12	3.73	0.60	16.11	85.69	1.32	1.30	1.26
445.00	3.15	3.66	0.51	16.05	85.67	1.32	1.29	1.26
470.00	3.25	3.57	0.31	15.95	85.82	1.32	1.29	1.26
500.00	3.36	3.51	0.15	15.81	85.95	1.32	1.28	1.26
530.00	3.46	3.48	0.02	15.64	86.13	1.32	1.28	1.26
555.00	3.50	3.47	0.03	15.46	86.29	1.33	1.29	1.27
570.00	3.51	3.49	0.02	15.33	86.45	1.34	1.29	1.27
585.00	3.51	3.50	0.00	15.19	86.51	1.35	1.29	1.28
600.00	3.50	3.52	0.02	15.03	86.83	1.35	1.30	1.29
620.00	3.46	3.57	0.11	14.77	87.07	1.37	1.31	1.30
630.00	3.45	3.60	0.15	14.65	87.17	1.38	1.32	1.31
645.00	3.43	3.67	0.24	14.44	87.49	1.40	1.33	1.33
660.00	3.38	3.76	0.38	14.21	87.82	1.42	1.34	1.35
675.00	3.34	3.87	0.53	13.96	88.21	1.44	1.36	1.37

1. Total Loss = Insertion Loss + 3dB splitter loss.

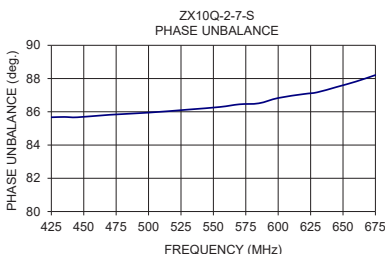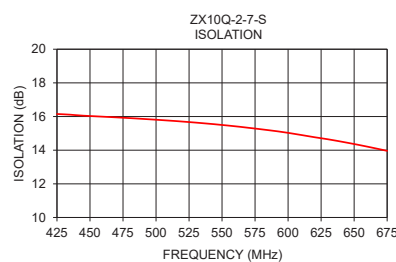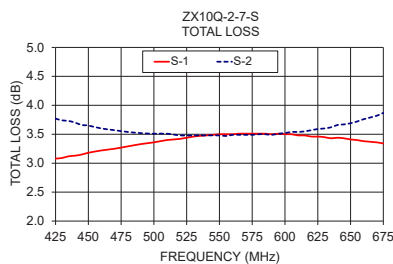

### Electrical Schematic



### Notes

- Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- Electrical specifications and performance data contained in this specification document are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
- The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp)



Generic photo used for illustration purposes only

CASE STYLE: GW1052

Connectors	Model
SMA	ZX10Q-2-7-S(+)

### +RoHS Compliant

The +Suffix identifies RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications