

DIN MOUNTING RAILS


Altech DIN Rails comply with DIN 50045, 50022 and 50035 Standards. DIN Rails have been accepted throughout the world, allowing the designer to mount a wide variety of control components, devices, terminal blocks, etc. on the same rail. The use of DIN Rails enhances design capabilities, saves space and reduces labor.

Standard rails are made of steel with zinc plating and chromate passivation and are available in various configurations.

DIN Rails are available in 35mm (7.5 and 15mm deep), 32mm and 15mm widths and are supplied in 1 m (3'3") and 2 m (6'6") lengths. Upon request they can be cut to custom lengths and punched with holes or perforations.


- 35mm, 32mm, 15mm
- Perforated or unperforated
- Rail material is steel with electrolytic zinc plating

DIN35

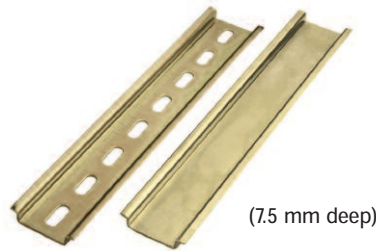


| Type | Cat. No. | Length | Std. Pk. |
|--------------------|------------|--------|----------|
| Perforated Steel | 2511120 | 2m | 20 |
| | 2511120/1M | 1m | 40 |
| Unperforated Steel | 2511110 | 2m | 20 |
| | 2511110/1M | 1m | 40 |

DIN35

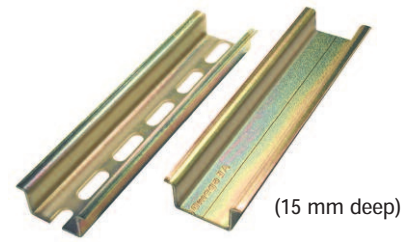

| Type | Cat. No. | Length | Std. Pk. |
|--------------------|---------------|--------|----------|
| Perforated Steel | CA701-15/S-2M | 2m | 12 |
| | CA701-15/S | 1m | 24 |
| Unperforated Steel | CA701-15-2M | 2m | 12 |
| | CA701-15 | 1m | 24 |

DIN32

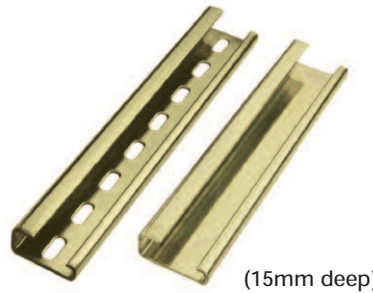

| Type | Cat. No. | Length | Std. Pk. |
|--------------------|------------|--------|----------|
| Perforated Steel | 2511160 | 2m | 12 |
| | 2511160/1M | 1m | 24 |
| Unperforated Steel | 2511150 | 2m | 12 |
| | 2511150/1M | 1m | 24 |

DIN15




| Type | Cat. No. | Length | Std. Pk. |
|------------------|----------|--------|----------|
| Perforated Steel | CA601/S | 1m | 40 |

SUPPORT BRACKETS

Support Brackets elevate DIN Rails away from the panel to facilitate component mounting and to increase wiring access. Angled brackets tilt the rail by 45° to improve visibility. Straight brackets are available in three heights for optimum positioning of the rail.

Brackets mount with 2 screws to any panel or flat surface and have tapped center holes for rail mounting. Bracket material is steel, zinc plated yellow chromated.


CA603

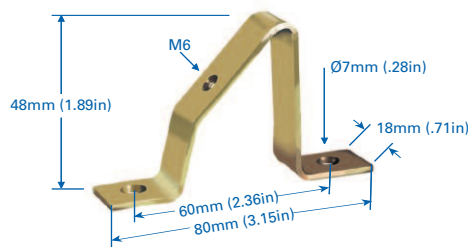

Suitable for all mounting rails

| Cat. No. | Std. Pk. |
|----------|----------|
| CA603 | 25 |

TSTW

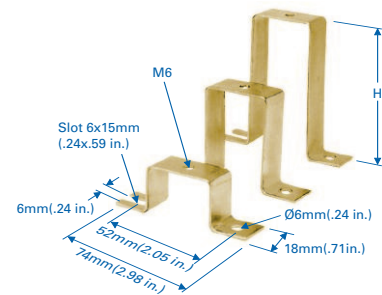

Complete with rail mounting hardware: including one screw & one locknut

| Height | Cat. No. | Std. Pk. |
|--------|----------|----------|
| 1" | CA703 | 25 |
| 2" | CA803 | 25 |
| 3" | CA903 | 25 |