

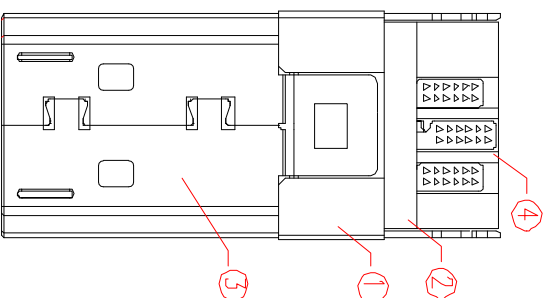
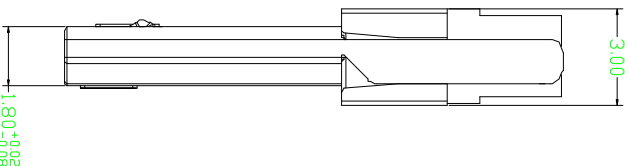
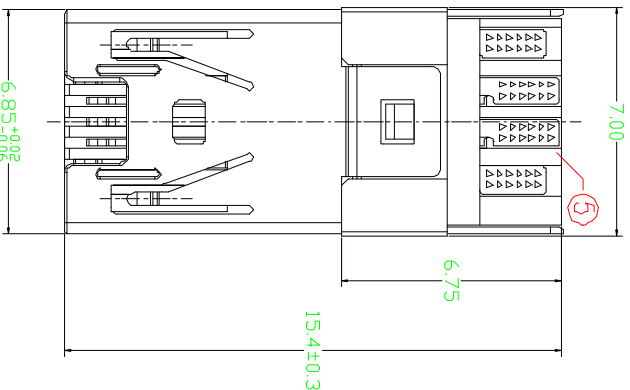


MAPX	MODIFICATION	DATE



产品规格说明, (specifications)
 电器特性: (Electrical characteristics)

- 最大阻30毫欧: (30 milliohms MAX)
 2. 耐电压: (Dielectric withstanding voltage)
 500伏特交流电 (500V AC AT Sea Level)
- 绝缘阻抗: (Insulation Resistance)
 最小值1000兆欧姆 (1000 mega-ohms MIN)

材料: Material:

- 塑料: PLASTIC: □ LCP □ PBT □ PA97
- 端子: TERMINAL: □ C2680 □ C5191
- 外壳: SHELL: □ SPCC □ C2680 □ C5191

- 电镀: (Finish):
- 端子 (Contact): Plated Gold in Mating Area:
 Tin On Solder Tails
 接触点镀金, 镀亮锡。
 接触点镀金 □ 1U" □ 3U" □ 5U" □ 15U" □ 30U" 铜铁锡
 - 外壳: (Shell): Nickel Plating 镀亮锡

注明: 1.标注编号为*重点检测尺寸, 图纸部分仅供参考, 因技术改良, 客户不同需求, 部分细节会与实物有区别, 请以实物为准。

产品图

公差一览表

TOLERANCE UNLESS OTHERWISE	公差
X, ±0.15	X, ±0.15
X, ±0.10	X, ±0.10
.XX, ±0.05	.XX, ±0.05
.XXX, ±0.03	.XXX, ±0.03
X, ±5.°	X, ±5.°
X, ±2.°	X, ±2.°
.XX, ±1.°	.XX, ±1.°
.XXX, ±0.5°	.XXX, ±0.5°

深圳市精拓金电子有限公司

单位	比例	日期	制图	审核	批准	制料号	产品名称	版本
MM	1:1	2016-09-09	许培强	郭治富	黄国荣	PRODUCT PART NO	mcitro	VER
			APPD			PRODUCT NO		A0