REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE

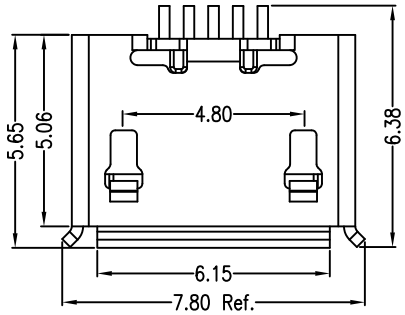

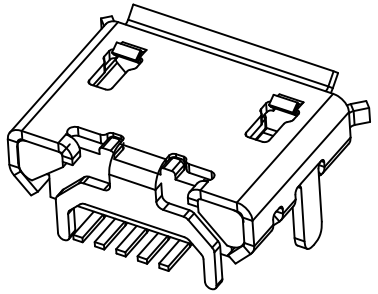


SECTION A–A

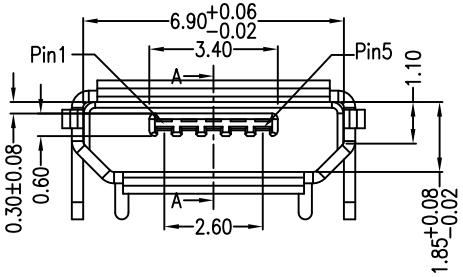






不锈钢双铆合



铜壳单铆合

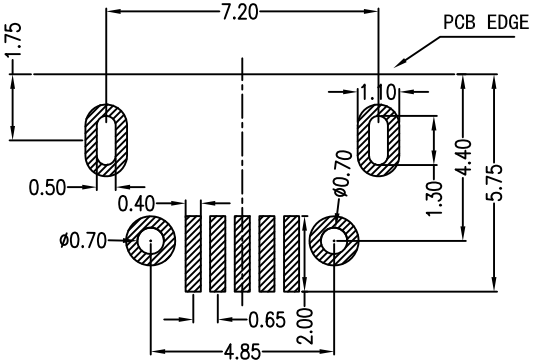

PCB图仅做参考

Note:
1.Material:
- 1.1 Housing: High temperature thermoplastic with g.f,UL94v–0
- 1.2 Contact: copper alloy,t=0.15mm
- 1.3 Shell: copper alloy,t=0.30mm

2.Specification:
- 2.1 Current rating:1,5PIN 1.8A Max/2,3,4PIN 1A Max.
- 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 100 MΩ Min.
- 2.5 Total mating force: 3.57 Kgf Max.
- 2.6 Total unmating force: 1.0 Kgf Min.
- 2.7 Temperature range: –30°C~80°C

A 01 S B X X X X X XX–066
① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪

- ⑤ 外壳材质 1:C2680R-H
- ⑥ 外壳电镀 1:N50u'' 2:雾T50u'' 3:N+Au1u''(脚) 4:Au1u''
- ⑨ 主体颜色 B:黑色
- ⑧ 主体材质 1:LCP
- ⑦ 端子材质 4:C5191R-EH
- ⑩ 端子电镀 01:Au1u'';02:Au1.5u'';03:Au3u'' 05:Au5u'' ;10:Au10u'';15:Au15u'';30:Au30u''

PART NO: A01SBXXXXXXX–066		MATERAL: SEE NOTE	深圳市精拓金电子有限公司
MODEL NO: XX		FINSH: SEE NOTE	
UNIT: MM	SIZE: A4	COLOR: SEE NOTE	TITLE: MIRCO USB 5S B TYPE 四脚全插(牛角型)加长0.75
TOLERANCE UNSPECIFIED .x ±0.15 .xx ±0.10 .xxx ±0.05 Ang. ±1°		DR: xiayouhong	DWG NO: A066 REV: A
		CHK:	SCALE: 5:1 DATE: 2012.05.22
		APP:	