


Note:

1. Material:
 - 1.1 Housing: High temperature thermoplastic UL94v-0
 - 1.2 Contact: copper alloy, t=0.20mm
 - 1.3 Shell: Stainless steel, t=0.20mm
 - 1.4 Latch: Stainless steel, t=0.35mm
2. Specification:
 - 2.1 Current rating: 1 A Max.
 - 2.2 Dielectric withstanding voltage: 100 V(ac) for 1 min.
 - 2.3 Contact resistance: 50 mΩ Max.
 - 2.4 Insulation resistance: 100 MΩ Min.
 - 2.5 Total mating force: 35N Max.
 - 2.6 Total unmating force: 10N Min.
 - 2.7 DURABILITY: 10000 CYCLES
 - 2.8 Temperature range: -30° C~80° C
3. SALT SPRAY : 24H AT 35%DC WITH 5%-SALT-SOLUTION CONCENTRATION.
4. 符合 UL 94 3.2mm V0防火等级.

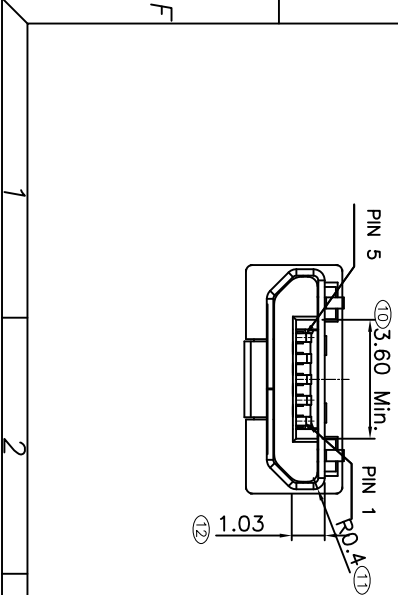

PRD.		DIMENSION STYLE MM ONLY		深圳市精拓金电子有限公司 MICRO USB 2.0单排焊线 第五层二			
OTHERWISE SPECIFIED		X.X±0.35					
TOLERANCE UNLESS OTHERWISE SPECIFIED		X.±5°		X.±3°		X.±2°	
DESIGN UNIT METRIC		SCALE 1:1		DRAWN BY 袁腾飞		DATE 2013/07/06	
TITLE		PART NO.		CHECKED BY		DATE	
MOLD NO.		SEE TABLE		APPROVED BY		DATE	
DWG-MICRO 5M-030		SHEET NO. 1 OF 1		MOLD NO.		REV. A0	

ITEM	MODIFICATION	DATE	DRAW	APPROVE
6	新发行	2013-07-06	袁腾飞	