
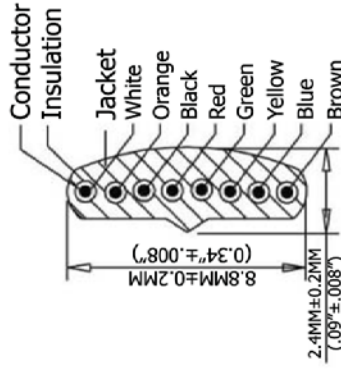


**Extended length is with 500g of force**

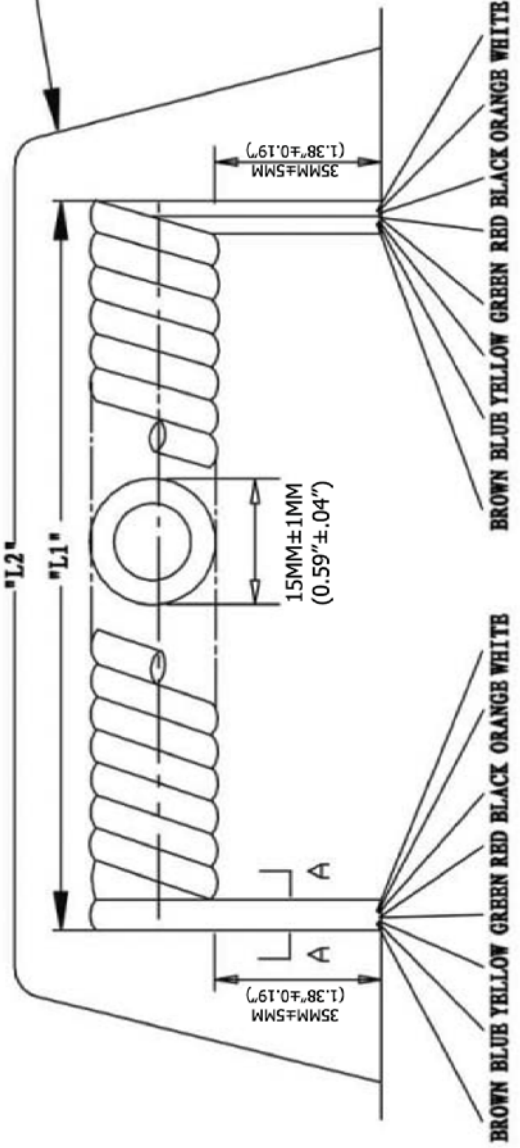

SEC: A=A

**Material:**

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X43): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

Extended Length ("L2")	Typical Retracted Length ("L1")
60.0 Inches - 69.0 Inches 1,524.0MM-1,752.6MM	28.0 Inches 711.2MM

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°



Name	Date	Modification	Name
Chappell			
Drawn	11.21.11		
Approved			



Item No.	<b>AT-K-C-26-8-W/5</b>
Title	NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Pre-Cut, 5 Ft., White
Drawing No.	<b>rev00</b>
Replace	Sheet