


**Extended length is with 500g of force**

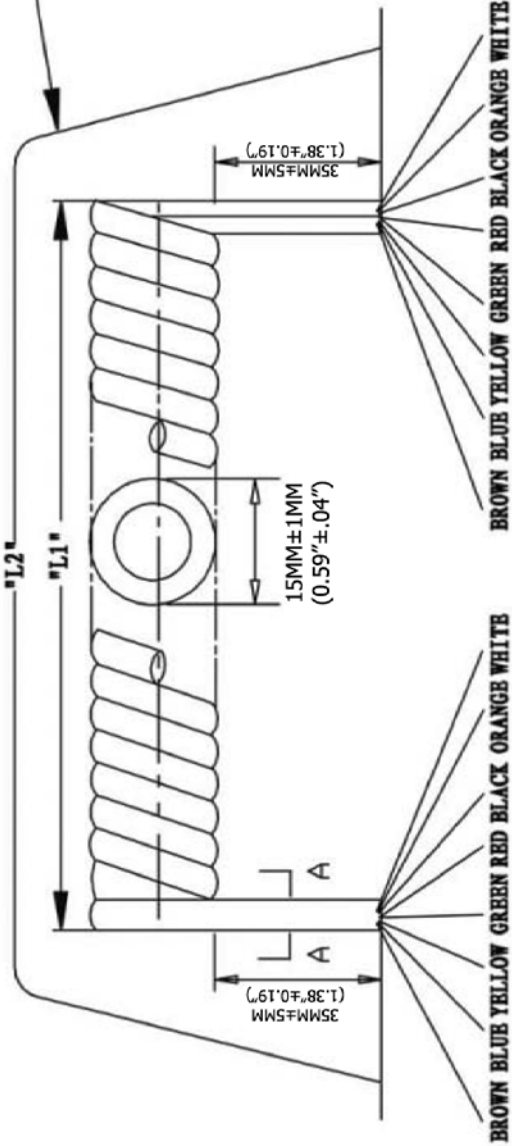


**Material:**

- Conductor(X4C): 26AWG (0.12X12) Bare Copper
- Insulation(X43): PP6331 ID 0.95-1.0
- Jacket: PVC NOUL 80P
- Package: Individual PE Bag

**Electrical:**

- Voltage rating: 30V (DC)

Extended Length ("L2")	Typical Retracted Length ("L1")
84.0 Inches - 96.6 Inches	39.5 Inches
2,133.6MM - 2,453.64MM	1,003.3MM

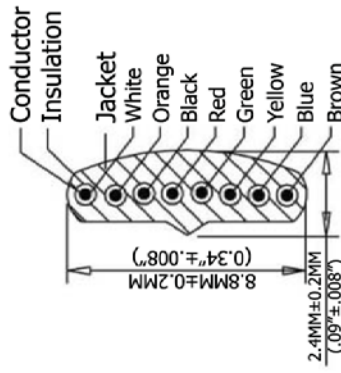

**SBC: A=A**

Scale	1:1
TOLERANCE	
X.X	±0.40
X.XX	±0.25
X.XXX	±0.15
Angle	±3°



Name	Item No.
Chappell	<b>AT-K-C-26-8-B/7</b>
Drawn	11.21.11
Approved	
<b>Title</b> NON-UL 26AWG (0.16/7)*8C, O.D.: 2.4*8.8MM, Pre-Cut, 7 Ft., Black Drawing No.	
Replace	rev00
Sheet	