


SPECIFICATION CONTROL DRAWING

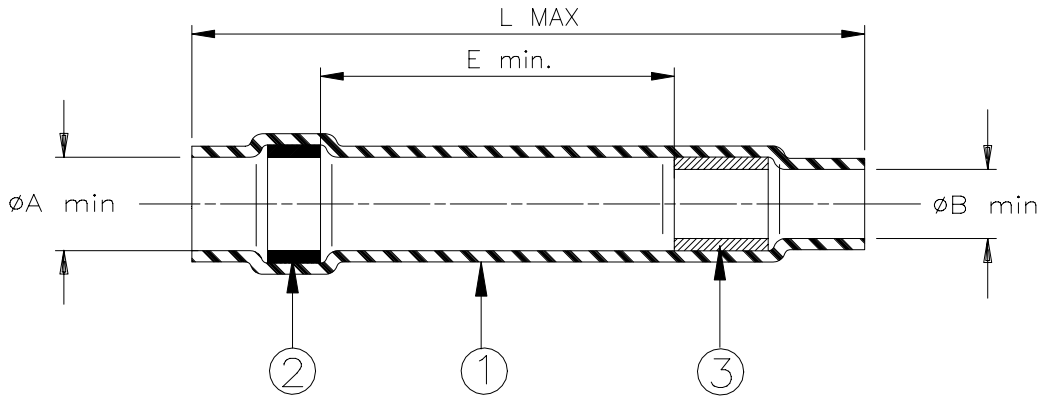

Product Revision		Product Dimensions				Cable Dimensions	
Product Name		L max	E min	øA min	øB min	øD min	øD max
D-108-06	F	127 (5.0)	73 (2.875)	8.9 (0.350)	7.5 (0.295)	4.5 (0.175)	7.5 (0.295)
D-108-07	E	127 (5.0)	74 (2.915)	10.2 (0.400)	8.8 (0.345)	5 (0.200)	8.8 (0.345)
D-108-08	E	131 (5.150)	74 (2.915)	12.7 (0.500)	11.3 (0.445)	7 (0.275)	11.3 (0.445)


MATERIALS

- INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride
- SOLDER PREFORM WITH FLUX:
 SOLDER: TYPE Sn96 per ANSI-J-STD-006.
 FLUX: TYPE ROM1 per ANSI-J-STD-004.
- MELTABLE INSERT: Meltable thermoplastic. Color: clear.

APPLICATION

- These parts are designed to attach an overshield to butt spliced shielded cables.
- Temperature range: -55°C to +150°C.

Cable dimensions: see table.



* A trademark of Raychem Corporation.

Raychem		THERMOFIT DEVICES	Raychem Corporation 300 Constitution Drive Menlo Park, CA 94025 USA	TITLE: SOLDERSLEEVE* DEVICE			
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. INCHES DIMENSIONS ARE BETWEEN BRACKETS.				DOCUMENT NO: D-108-06/-08			
TOLERANCES: 0.00 N/A 0.0 N/A 0 N/A	ANGLES: N/A ROUGHNESS IN MICRON	Raychem reserves the right to amend this drawing at any time. Users should evaluate the suitability of the product for their application.		DCR NUMBER: D980906		REPLACES: D10807	
DRAWN BY: M. FORONDA	DATE: 06/29/98	PROD. REV. SEE TABLE	DOC ISSUE: 1	SCALE: None	SIZE: A	SHEET: 1 of 1	

If this document is printed it becomes uncontrolled. Check for the latest revision.