

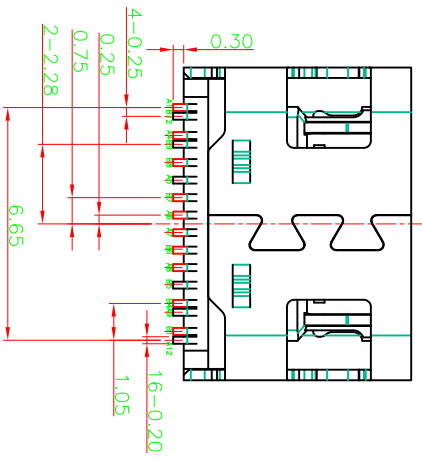
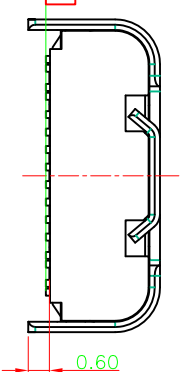
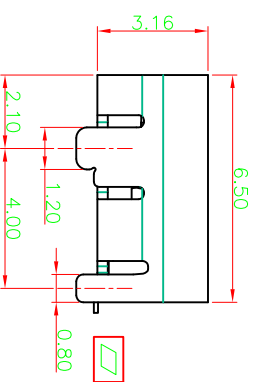
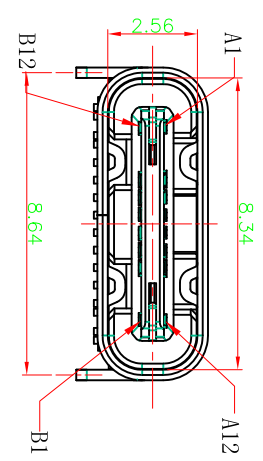
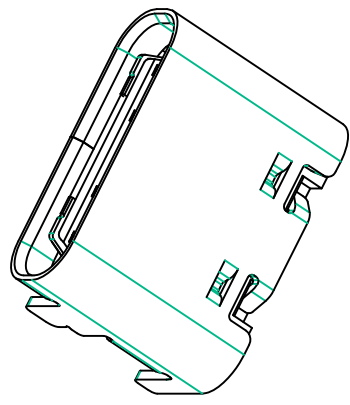


ROHS

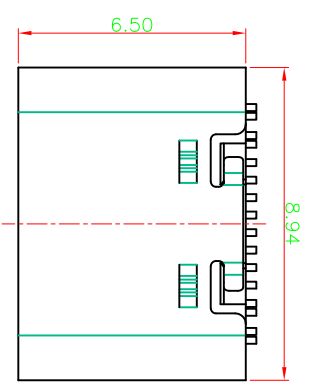

A1	GND	B12	GND
A4	VBUS	B9	VBUS
A5	CC1	B8	SBU2
A6	DP1	B7	DN2
A7	DN1	B6	DP2
A8	SBU1	B5	CC2
A9	VBUS	B4	VBUS
A12	GND	B1	GND
PIN	SIGNAL NAME	PIN	SIGNAL NAME

- NOTES:
SPECIFICATION:
1. CURRENT RATING: 3.0A MAX
 2. VOLTAGE: 100 VAC
 3. TEMPERATURE RANGE: -30 °C ~ 85 °C
 4. CONTACT RESISTANCE: 40 MILLIONHM MAX
 5. INSULATION RESISTANCE: 100 MEGOHMS MIN.
 6. INSERTION FORCE : 5N~20N
 7. UNMATING FORCE: 8N~20N
 8. DURABILITY: 10,000 CYCLES

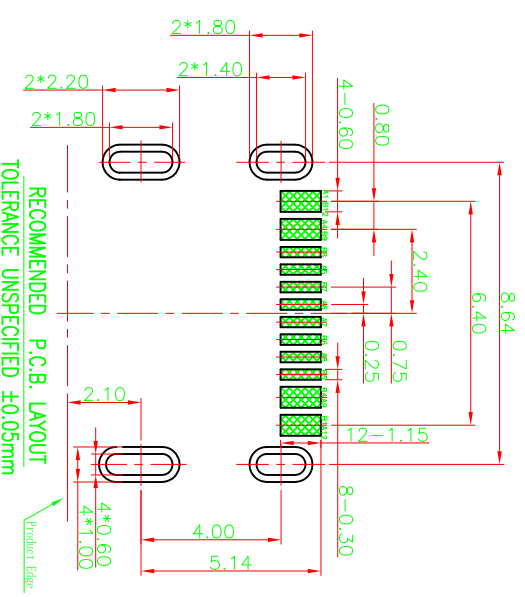

5	SHELL	STAINLESS STEEL	Ni Plated	1PCS
4	SPRING	STAINLESS STEEL	---	1PCS
3	SHIELDING PLATE	STAINLESS STEEL	Ni Plated	1PCS
2	CONTACT	COPPER ALLOY	Au/Ni Plated	1SET
1	HOUSING	HIGH TEMPERATURE PLASTIC	BLACK	1PCS
NO.	DESCRIPTION	MATERIAL	REMARKS	QTY

产品图
公差一览表

TOLERANCE	LIMITLESS	OTHERWISE
X	±0.35	X
X	±0.20	X
.XX	±0.10	.XX
.XXX	±0.05	.XXX

产品料号: _____
产品名称: _____
US9 C F TYPE: 5.4 4.0 3.0 2.0 1.5 1.0 0.8

深圳市精拓金电子有限公司

单位	MM	制图	许榕强
比例	1:1	审核	郭治富
日期	2015-09-09	核准	黄国梁
DATE		APPD	
UNIT	MM	DRAWING	
SCALE	1:1	CHKD	
DATE	2015-09-09	APPD	
UNIT	MM	DRAWING	
SCALE	1:1	CHKD	
DATE	2015-09-09	APPD	

MAPX

MODIFICATION

DATE

